

DATA SHEET: HOUR METER AC 230V AC WITH TERMINAL COVER




SCHRACK-INFO

- For DIN-rail mounting
- Flush mount dimensions 45 x 35 mm
- With terminal cover
- Screw terminals (pull-up type)
- Touch proof connections
- With operation indicator (flashing LED)
- One Version for 50 and 60 Hz

TECHNICAL DATA

Supply voltages	230 V AC, 50–60 Hz
Voltage tolerance	±15%
Power consumption (real power)	0,26 W
Counter capacity	99,999 h.
Accuracy of reading	0.1 h.
Numeral height	4.4 mm
Numeral colour	white, decimal figure red
Operation indicator (without reset)	flashing LED
Permitted ambient temperature	-15°...+55°C
Enclosure	self-extinguishing thermoplastic
Type of connection	Screw terminals
Type of protection (DIN EN 60529)	IP 50 to DIN EN 60529
Class of protection	II (when fitted in accordance with regulations)

DIMENSIONS

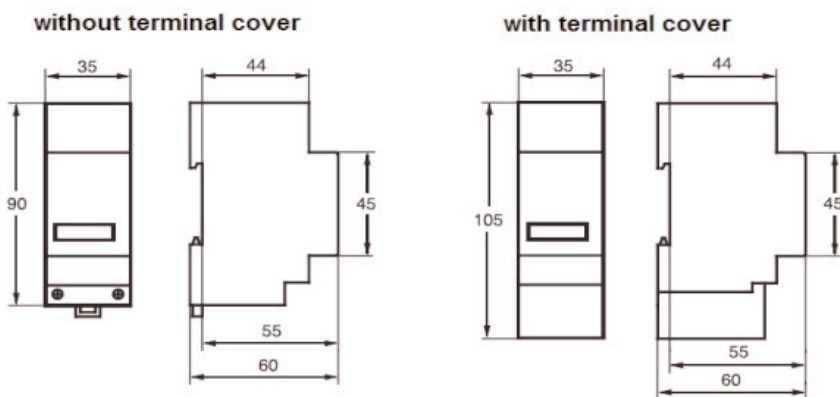

DESCRIPTION	ORDER NO.
Hour meter AC 230VAC with terminal cover	BZ326418-A